




# MICROLAB/FXR

CE-D and CF-D series

## Loop Coupler

High Power, Low Loss, Low PIM  
Range 200 - 3000 MHz

- ◆ Precise Setting of Coupling Value
- ◆ Single (CE-D) and Dual (CF-D) Models
- ◆ 750 Watt Average Power Rating
- ◆ High Directivity
- ◆ Air Dielectric for minimal RF Insertion Loss
- ◆ High Reliability, Low PIM
- ◆ RoHS Compliant
- ◆ Also available with N connectors

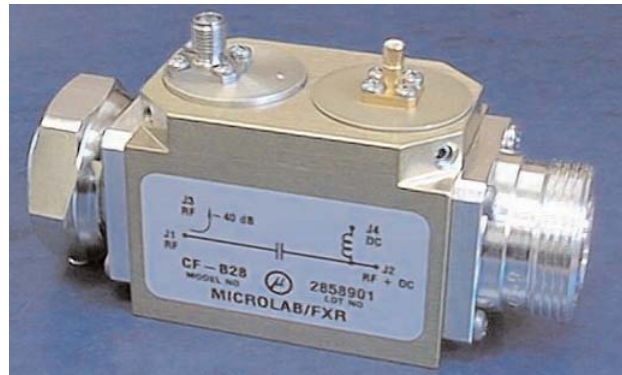

Microlab/FXR loop couplers are set-and-lock devices that provide precise coupling values over customer specified frequency ranges and excellent unit-to-unit tracking. Air dielectric main lines provide the extremely low insertion loss required to handle high power levels. They are available in single and dual units for use over bandwidths of 15% or less, anywhere in the 200 to 3000 MHz frequency range.

Microlab loop couplers are constructed from standardized designs and employ stocked components. Loop couplers exhibit a 6 dB per octave coupling variation, generally acceptable for system applications.

Options include other connectors for the coupled port, 3 and 4 coupled ports, substitution of a loop coupler with a low pass filter that can carry a DC bias to the main line, and incorporation of a DC Block into the main line as required. Call for details. (8/06)

Frequency Range, MHz:	200 - 400	400 - 800	800 - 1200	1200 - 3000
Available Coupling Values, dB:	30 - 50	25 - 50	20 - 50	20 - 50
Main Line VSWR, max:	1.20:1	1.20:1	1.20:1	1.25:1
Coupled Line VSWR, max:	1.25:1	1.25:1	1.25:1	1.50:1
Dissipative Loss, dB max:	0.05	0.05	0.05	0.10
Directivity, dB:	25	25	25	20

Power Rating: 750W avg., 10 kW pk.  
Impedance: 50Ω nominal  
Intermod. Distortion: <-140 dBc (2 x 20W)  
Temperature: -35°C to +75°C  
Applications: Indoor  
Body Finish: Passivated Aluminum  
7-16 Connectors: Silver or triplate  
SMA Connectors: Passivated stainless steel  
Weight CE/CF, nom: 10 (280)/15 (425) oz (g)

### Coupling Specifications and Limitations


Coupling accuracy at mid-band:

For Coupling Values:	20 - 40	> 40 dB
Accuracy, dB:	± 0.25	± 0.35

Coupling flatness:

Bandwidth:	2%	4%	10%	15%
Flatness, dB:	± 0.1	± 0.2	± 0.5	± 0.7

Available coupled arm connectors: N or SMA

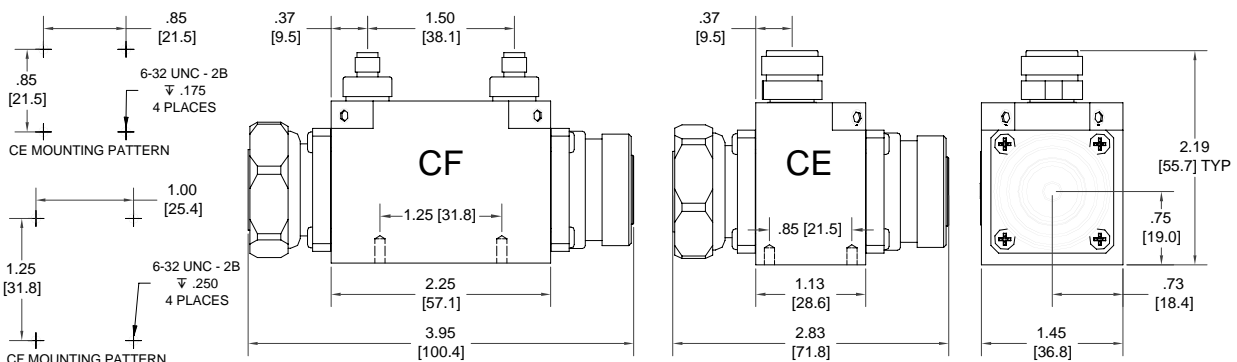

Microlab/FXR, A Wireless Telecom Group Company, 25 Eastmans Road, Parsippany, NJ 07054  
Tel: (973) 386-9696 • [sales@microlab.fxr.com](mailto:sales@microlab.fxr.com) • [www.microlab.fxr.com](http://www.microlab.fxr.com) • Fax: (973) 386-9191