

Wireless

3500A Portable Radio Communications Test Set



Digital Radio Test Options for P25, DMR and NXDN™!

Featuring

- 2 MHz - 1 GHz operation
- Transmitter and Receiver testing
- AM/FM Transceiver testing
- P25/DMR/NXDN™ digital radio test options
- Spectrum analyzer with <-136 dBm noise floor
- Tracking generator for duplex tuning
- Oscilloscope
- Save/Recall user setups
- Antenna and cable tests

The Aeroflex 3500A, the First Truly Rugged, Portable Radio Test Set

With the latest in portability, battery life and performance, the Aeroflex 3500A builds upon Aeroflex's expertise in developing portable radio communications test sets with exclusive features and affordability that are destined to set a new standard in portable radio test sets. Designed to meet the needs of a multitude of radio tests, the 3500A provides fast, reliable measurements of the radio's transmitter and receiver parameters. With the additional capability to perform quick testing of antennas and cables, the 3500A provides the most complete portable test solution available to quickly isolate problems and assess performance of the radio, cable and antenna systems. In addition, the tracking generator gives you the ability to re-tune your antenna duplexer located at your remote repeater sites.

Digital Radio Options

Now with support for DMR and NXDN™ along with P25, the 3500A has the capability of supporting the latest digital radio systems. Key RF modulation fidelity parameters along with several modulation patterns give the 3500A the power to quickly check the operation of a digital mobile or base station.

Portable and Rugged


- Easy portability - weighs less than 8 lbs. (3.6 kg)
- Rugged construction - solid magnesium alloy weatherproof case
- -20° to +55° C operating temperature range
- 5 hour battery life

Aeroflex engineers designed the 3500A from the ground up to be portable and rugged, weighing in at less than 8 lbs. (3.6 kg) including the battery. It has a solid magnesium alloy weatherproof case, an operating temperature range of -20° to +55°C, and rugged construction specifications (Mil-PRF-28800A) for humidity, altitude, shock, and vibration. The battery gives the user 5 hours of operation and can be fully re-charged and ready to operate in only 4 hours.

Radio Installation Failures

- Handset and antenna allow over the air "Talk Test"
- RSSI meter
- RF Error meter
- Modulation measurements
- Audio frequency counter
- Spectrum analyzer
- Audio frequency oscilloscope

We designed the 3500A so that you could use it for quick installed radio testing and efficiently find radio failures. The 3500A is lightweight and perfect for hand-held testing. There is no need to connect to the radio under test, simply connect the supplied antenna, key up the radio and then measure the radio parameters over-the-air. A push-to-talk button on the handset controls whether your 3500A is transmitting or receiving. The Duplex test screen is ideal for making quick transmitter and receiver measurements on an installed radio system.

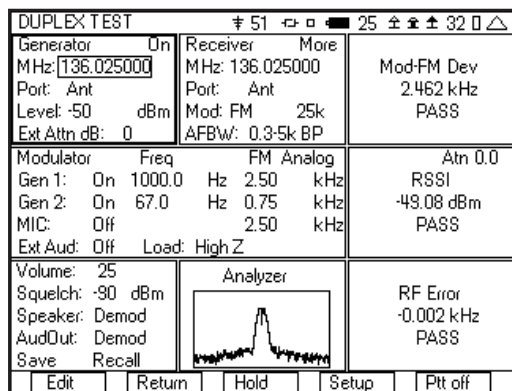


Duplex Test Screen

Direct Connect Testing

- RF power and frequency error
- AM modulation/FM deviation
- Audio frequency counter
- Receive Signal Strength Indicator (RSSI)
- DCS encode/decode
- DTMF encode/decode
- Distortion meter
- SINAD/sensitivity
- Spectrum analyzer
- Audio frequency oscilloscope
- Frequency find
- Audio level meter
- Pass/Fail limits


In addition to performing over the air measurements, the 3500A includes the capability to perform direct connect type testing on a radio. All radio parameters including power, frequency error, modulation accuracy, receiver sensitivity and audio performance are easily accessed and tested with the 3500A.

With the Receiver Test screen selected, the 3500A operates as a signal generator, enabling the testing of the receiver portion of the radio. Audio SINAD, distortion and frequency are among the tests that the 3500A can perform on the radio's receiver. With two internal generators that can be used as modulation sources, the 3500A can modulate the carrier with both a test tone and a squelch tone. Alternatively, the internal generators can generate both a test tone and DCS, enabling the testing of mobiles requiring a digitally coded squelch.

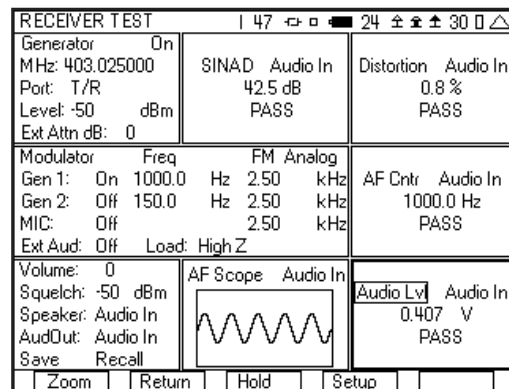


Receiver Test Screen

The Transmitter Test screen operates as a signal analyzer, measuring the parameters associated with the transmit portion of the radio being tested. Included in this screen are measurements of the modulation, the RF power, and RF frequency error. The frequency of sub-audible tones can also be measured by using the 0.3k LP filter and audio frequency counter.

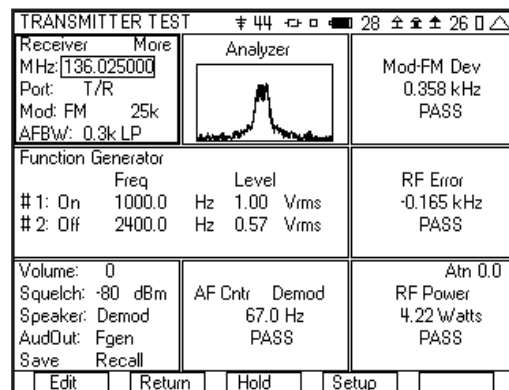

Transmitter Test Screen


Many of the meters can be "zoomed" into for additional setup, including programming the number of values to average and the pass/fail limits. The zoomed in meters also include bar graphs for a visual indication of the measurement.

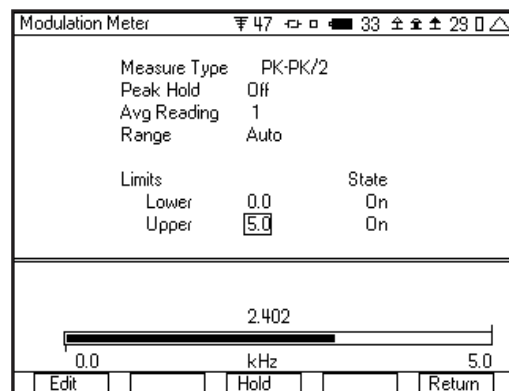

Modulation Meter

Any of the test screens can be easily configured with the meters that are needed according to the type of tests that the user wants to

perform by selecting the meters from the setup screen. Users can quickly define the "look" of the instrument by configuring the way the meters are displayed on the screen.

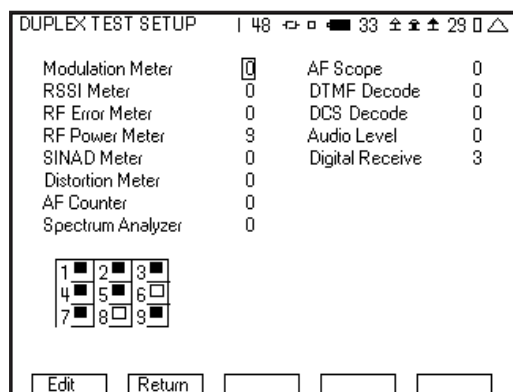


Duplex Test Setup Screen

Isolate Cable and Antenna Problems

Since many radio faults in an installed radio system lie in the cabling and/or antenna and not with the radio, the 3500A includes the capability to measure the VSWR or return loss of an antenna and the loss or distance to fault of a cable. By isolating the problem to the cable, connector or antenna you can avoid returning good radios to the depot or manufacturer for repair, thus, avoiding radio system downtime. The ANT-CABLE Test screen provides the user with the option to display:


- VSWR versus frequency
- Return loss versus frequency
- Cable loss versus frequency
- Return loss versus feet

The display of VSWR or Return Loss (RL) versus frequency is valuable for observing the performance of an antenna.

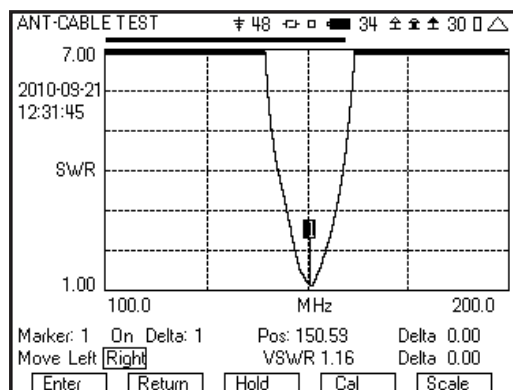

VSWR of a VHF Antenna


The display of return loss versus feet is descriptive of the characteristics of a cable, illustrating to the user the precise location of faults (DTF). For example, the following illustrates a cable that has a minor fault with the location of marker 1 at the fault and marker 2 at the end of the cable.

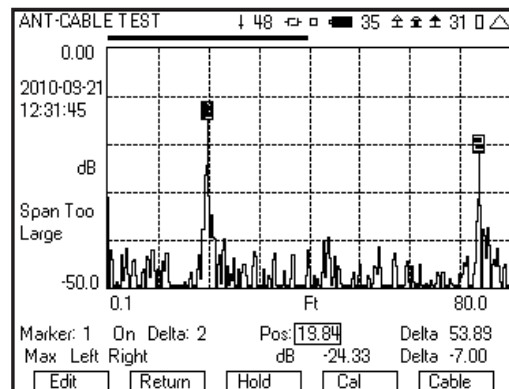

Distance to Fault screen

Save/Recall Features

The 3500A allows users to configure the test setup and then save these setups internally for future use. This feature allows fast testing on radios that require constant testing, base station verification and for testing a large number of the same radio.

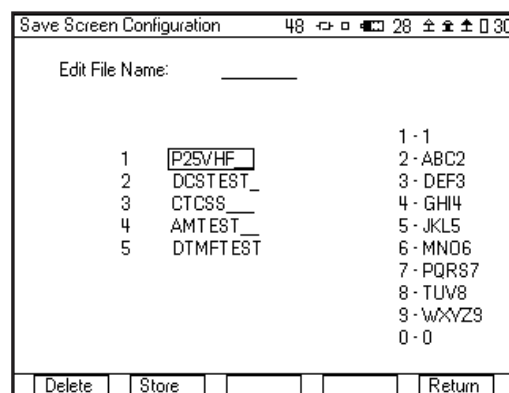


Save Screen


Spectrum Analyzer (35XXOPT01)

- Noise floor < -136 dBm
- Spans from 10 kHz to 5 MHz
- Effective resolution bandwidths down to 19 Hz
- Peak hold
- Average function

Option 35XXOPT01 is an FFT based spectrum analyzer. An FFT analyzer uses a snapshot of the incoming RF signal that is within the selected span and converts it to a frequency spectrum. The advantage of using this method is that the spectrum is converted from one set of data and not from a sweep where the RF signal may have changed from the start of the frequency sweep to the finish. The noise floor of the spectrum analyzer is < -136 dBm in the 10 kHz span. The 3500A analyzer has a span width that ranges from 10 kHz to 5 MHz with an effective resolution bandwidth as narrow as 19 Hz. A marker function includes the capability of measuring the power within a particular bandwidth and at a specified offset from the center frequency. The 3500A Spectrum Analyzer can be accessed from the Transmitter Test screen, the Duplex Test screen, and as a stand-alone spectrum analyzer.

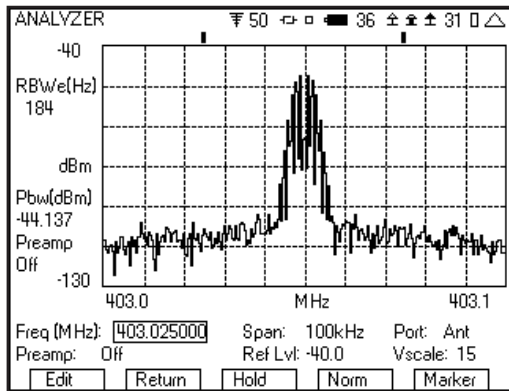

Spectrum Analyzer Screen

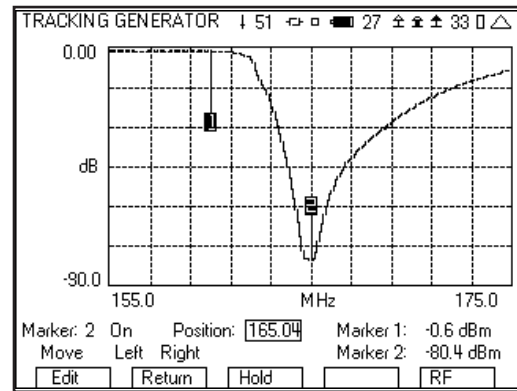


Tracking Generator

Oscilloscope (35XXOPT02)

- Horizontal range of 50 ms/Div to 0.1 Sec/Div
- Two markers
- Audio bandwidth

With the oscilloscope option, we can display external audio or the demodulated audio of a received signal. The oscilloscope features 2 markers and a horizontal range of 50 mS/Div to 0.1 Sec/Div, sufficient for observing and analyzing audio signals. The oscilloscope is available from the Duplex, Transmitter, or Receiver Test screens for use during any type of testing.

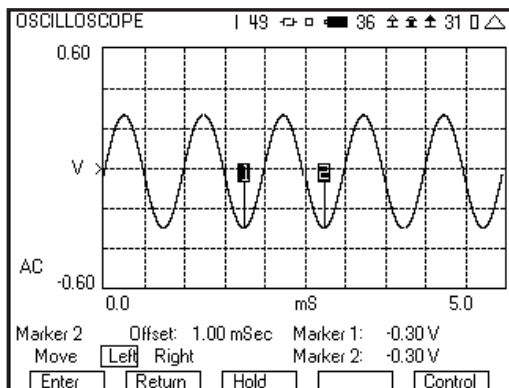

Oscilloscope Screen

Tracking Generator (35XXOPT08)

- Spans from 10 kHz to full span
- 2 markers for pinpointing level of signal
- Output level adjustable from 0 to -60 dB (relative to maximum output of 3500A)


This option is totally software based and is upgradable to units that are already in the field. This option was designed specifically for aligning duplexers and filters.

DIGITAL RADIO OPTIONS

P25 Test (35XXOPT07)

- Modulation Fidelity, Deviation, and Frequency error meters
- Transmit BER meter
- Signal power meter
- Transmit standard 1011 Hz, O.153, and calibration patterns

The 3500A P25 option gives you the capability to test P25 mobiles, hand-helds, repeaters and base stations. With this option, you can measure Modulation fidelity, deviation and frequency error and transmit standard patterns as specified by TIA-102.CAAA-C. This function becomes part of the Duplex, Transmitter or Receiver testing screens when this option is installed.

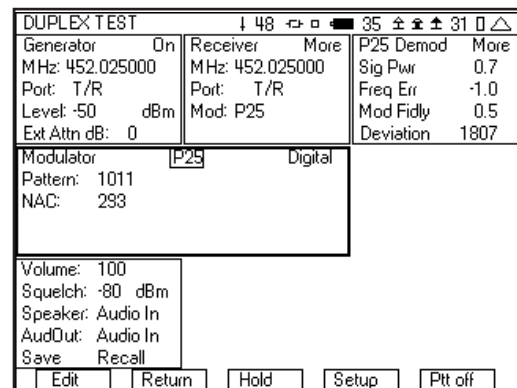

Duplex Test Screen with P25

NXDN™ Test (35XXOPT33)

- Signal power meter
- Frequency Error meter
- FSK Error meter
- Symbol Deviation meter
- Transmit BER meter
- RAN Decode
- Transmit 1031 Hz, O.153, and calibration patterns
- User programmable RAN for transmit

With the NXDN™ test option you will be able to measure the key NXDN™ RF parameters with the 3500A. These measurements verify the correct operation of both the transmitter and receiver of an NXDN™ radio. The 1031 Hz pattern along with the selectable RAN enables a test of the audio of a NXDN™ radio without requiring it to be in test mode. With the O.153 random data pattern, you can perform BER testing of the receiver, to verify that it meets its sensitivity requirements.

DUPLX TEST			
Generator On	Receiver More	NXDN Demod More	
MHz: 136.025000	MHz: 136.025000	Sig Pwr 36.3 P	
Port: T/R	Port: T/R	Freq Err -142.8 P	
Level: -50 dBm	Mod: NXDN	FSK Err 1.2 P	
Ext Attn dB: 0		Sym Dev 1053 P	
Modulator NXDN Digital			
Pattern: 1031			
RAN: 1			
Rate: 4800			
Volume: 100			
Squelch: -80 dBm			
Speaker: Audio In			
AudOut: Audio In			
Save Recall			
Edit	Return	Hold	Setup Ptt off

Duplex Screen with NXDN™

DMR Test (35XXOPT34)

- Burst Power meter
- Frequency Error meter
- FSK Error meter
- Symbol Deviation meter
- Magnitude Error meter
- Transmit BER meter
- Color Code, Call ID, and Radio ID decode
- Transmit 1031 Hz, O.153, and calibration patterns
- Base Repeater pattern for duplex radio testing
- User programmable Color Code and Call ID

With the DMR option, the 3500A can now perform a complete test on the transmitter and receiver of a DMR radio. This testing includes the measurement of the key modulation fidelity parameters, FSK error, magnitude error, symbol deviation and frequency error. The 3500A can also measure the power during the burst and the power level between the bursts. In order to enable the testing of radios, without requiring them to be put into a special test mode, the 3500A also has a programmable color code and call ID. A key feature of the 3500A is the base repeater (BR) pattern. A radio in duplex mode must synchronize with this BR pattern before it can transmit. It would not be possible to test a duplex radio without this selection.

DUPLX TEST			
Generator On	Receiver More	DMR Demod More	
MHz: 403.025000	MHz: 408.025000	Freq Err -92.1	
Port: T/R	Port: T/R	FSK Err 1.5	
Level: -50 dBm	Mod: DMR	Sym Dev 1930	
Ext Attn dB: 0		Mag Err 0.44	
Modulator DMR Digital			
Pattern: BR			
Color: 1			
Volume: 100			
Squelch: -80 dBm			
Speaker: Audio In			
AudOut: Audio In			
Save Recall			
Edit	Return	Hold	Setup Ptt off

Duplex Test Screen with DMR

SPECIFICATION

RF SIGNAL GENERATOR

FREQUENCY

Range

2 MHz to 1 GHz (Useable from 500 kHz)

Resolution

1 Hz

OUTPUT LEVEL

Range

T/R port: -50 to -120 dBm/707.11 μ V to 0.22 μ V

ANT port: -30 to -90 dBm/7071.07 μ V to 7.07 μ V

SWR port: -5 to -65 dBm/125743.3 μ V to 125.7 μ V

Resolution

Display 1 dB/0.01 μ V

Step size 1 dB

Accuracy

± 2 dB

± 3 dB (<-100 dBm)

SSB PHASE NOISE

-80 dBc/Hz at 20 kHz offset,

SPURIOUS

Harmonics

-30 dBc

Non-Harmonics

-40 dBc (> ± 20 kHz offset from carrier) in Band

RESIDUAL FM

<60 Hz in 300 Hz to 3 kHz BW

Typically <20 Hz

RESIDUAL AM

<5% in 300 Hz to 3 kHz BW

Typically <1%

PORT INPUT PROTECTION

ANT port: +20 dBm

SWR port: +20 dBm

T/R port: +44 dBm

PORT VSWR

ANT port: <1.5 : 1

SWR port: <1.5 : 1

T/R port: <1.25 : 1

FM DEVIATION (GEN 1 AND GEN 2)

Modulation Frequency Rate

Range

0.0 Hz to 20.0 kHz

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

FM Modulation

Range

Off, 0 Hz to 100 kHz

Resolution

10 Hz

Accuracy

$\pm 10\%$ (2 kHz to 50 kHz deviation, 150 Hz to 5 kHz rate)

Typically <2% (5.6 kHz deviation, 1 kHz rate)

Total Harmonic Distortion

3% (1 kHz rate, >2 kHz deviation, 300 Hz - 3 kHz BP filter)

EXTERNAL FM

MIC IN

Input Range

Range 1: 2–15 mVrms (8 mVrms nominal) MIC E-OPEN, F-GND

Range 2: 35-350 mVrms(100 mVrms nominal) MIC E-GND, F-OPEN

Range 3: 2-32 mVrms (20 mVrms nominal) MIC E-OPEN, F-OPEN

Range 2 turns on a nominal 3 Vdc bias voltage

Frequency Range

300 Hz to 3 KHz

Deviation Range

Off, 0 Hz to 80 kHz

Modulation Accuracy

$\pm 20\%$ (300 Hz to 1.2 kHz)

$\pm 30\%$ (>1.2 kHz)

Slope

Positive voltage yields positive deviation

AUDIO IN

Switchable Loads

150 ohms, 600 ohms, 1 K ohms, DIV 10, High Z

Input Levels

0.05 to 3 Vrms

Frequency Range

300 Hz to 5 kHz

Level Sensitivity

1 kHz/35 mVrms

Slope

Positive voltage yields positive deviation

AM MODULATION (GEN 1 AND GEN 2)

Modulation Frequency Rate

Range

10.0 Hz to 20.0 kHz

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

AM Modulation

Range

OFF, 0 to 100%

Resolution

0.1%

Modulation Accuracy

10% off setting, 150 Hz to 5 kHz rate, 10% to 90% modulation

Total Harmonic Distortion

3% (20% to 90% mod, 1 kHz rate, 300 Hz to 3 kHz BP filter)

EXTERNAL AM

MIC IN

Input Range

Range 1: 2–15 mVrms (8 mVrms nominal) MIC E-OPEN, F-GND

Range 2: 35-350 mVrms (100 mVrms nominal) MIC E-GND, F-OPEN

Range 3: 2-32 mVrms (20 mVrms nominal) MIC E-OPEN, F-OPEN

Range 2 turns on a nominal 3 Vdc bias voltage

Frequency Range

300 Hz to 3 KHz

Modulation Range

Off, 0 Hz to 80 KHz

AUDIO IN

Switchable Loads

150 ohm, 600 ohms, 1 K ohms, DIV 10, High Z

Input Levels

0.05 to 3 Vrms

Frequency Range

300 Hz to 5 kHz

Level Sensitivity

1% / 35 mVrms nominal

AFGEN 1 AND AFGEN 2

FREQUENCY

Range

30 Hz to 5 kHz (spec)

0.0 Hz to 20.0 kHz (usable)

Resolution

0.1 Hz

Accuracy

Timebase ± 2 Hz

OUTPUT LEVEL

Range

0 to 1.57 Vrms (into 600 Ω)

Resolution

0.01 Vrms

Accuracy

±10%

Distortion

<3% (1 kHz rate, sine, 300 Hz to 3 kHz)

RF RECEIVER

FREQUENCY

Range

2 MHz to 1 GHz (useable from 750 kHz)

Resolution

1 Hz

Accuracy

Same as timebase

INPUT AMPLITUDE

Minimum Input Level, Audio Sensitivity

ANT: -80 dBm (22.4 µV), typical 10 dB SINAD (-110 dBm with pre-amp)

T/R: -40 dBm (2236 µV), typical, 10 dB SINAD

Usable Input Level Range

ANT: -60 dBm (-80 dBm with RF Amp On) to -10 dBm (RF Error, Distortion, Modulation, AF Counter and AF Level)

ANT: -90 dBm (-110 dBm with RF Amp On) to -10 dBm (RSSI)

T/R: -20 dBm to maximum input level (RF error, Distortion, Modulation, AF Counter and AF Level)

T/R: -50 dBm to maximum input level (RSSI)

Maximum Input Level

ANT: +20 dBm/0.1 W for 10 seconds

T/R: +43 dBm/20 W (FM) and +37 dBm (AM)

+47 dBm/50 W (FM) and +41 dBm (AM) with 50 W attenuator

+51.76 dBm/150 W (FM) and 45.76 dBm (AM) with 150 W attenuator

AM/FM DEMODULATION

IF Bandwidth

FM: 5 kHz, 6.25 kHz, 8.33 kHz, 10 kHz, 12.5 kHz, 25 kHz, 30 kHz, 100 kHz, 300 kHz

AM: 5 kHz, 6.25 kHz, 8.33 kHz, 10 kHz, 12.5 kHz, 25 kHz, 30 kHz

Audio Filters Bandwidth

0.3-20 k BP, 0.3-5 kBP, 0.3-3 kBP, 0.3HP, CCITT BP, C-Wt BP, 15 K LP, 5 K LP, 3 K LP, 0.3 K LP

Audio Output Level Sensitivity

FM: (3 Vrms/kHz Dev)/IF BW (kHz) ±15%

AM: 7 mVrms/% AM ±15%

SPEAKER OUTPUT

75 dBa min. at 0.5 m, 600 - 1800 Hz, max volume

VOLUME CONTROL

Range

0 to 100

LO EMISSIONS

>-50 dBc

QUIETED CHANNELS

10 frequencies allowed between 2 MHz and 999.999 MHz quieted by no more than 30 dBRF TRANSMITTER TEST METERS

RF FREQUENCY ERROR METER

Range

±200 kHz

Resolution

1 Hz

Accuracy

Same as timebase ±2 Hz

RSSI INDICATOR (RF POWER WITHIN RECEIVER IF BANDWIDTH)

Display Range

dBm: -120 dBm to +43 dBm (+53 dBm with Ext Attn dB set to 20 dB)

Watts: 10 pW to 20 W (200 W with Ext Attn dB set to 20 dB)

Usable Meter Reading RF Level Range

T/R port: -50 dBm to +43 dBm

ANT port (without RF amp on): -90 dBm to -10 dBm

ANT port (with RF amp on): -110 dBm to -10 dBm

Resolution

0.01 dBm

Accuracy

±3 dB (>-50 dBm into T/R, >-90 dBm into ANT or >-120 dBm into ANT with RF Amp On)

RF POWER METER (BROADBAND RF POWER INTO T/R PORT)

Display Range

0 to 43 dBm (0 to 20 W)

Minimum Input Level

0.10 W/+20 dBm

Maximum Input Level

20 W/43 dBm for 10 minutes at +25° C or until thermal alarm sounds

Resolution

0.01 W/0.1 dBm

Accuracy

±1 dB

FM DEVIATION METER

Range

500 Hz to ±100 kHz

Modes

Peak+, Peak-, (Peak+ - Peak-)/2

Resolution

1 Hz

Accuracy

±10% of reading 500 Hz to 100 kHz Deviation

±5% 1 kHz to 10 kHz Deviation, 150 Hz and 1 kHz rate

AM PERCENT METER

Range

5% to 100%

Modes

Peak+, Peak-, (Peak+ - Peak-)/2

Resolution

1%

Accuracy

±5% of reading, 1 kHz rate, 30% to 90% modulation, 3 kHz LPF

ANT-CABLE TEST

Frequency Range

2.0 MHz to 1000.0 MHz

Span Range

10.0 MHz to 998 MHz

Start Range

2.0 MHz to 990.0 MHz

Stop Range

12.0 MHz to 1000.0 MHz

Frequency Resolution

0.1 MHz

Markers

3

Immunity to Interfering Signal

Typically -30 dBm

SWR MEASUREMENT

VSWR Range

1.00 to 20.00

Resolution

0.02

VSWR Accuracy

±10% of SWR readings (calibrated) <300 MHz

±20% of SWR readings (calibrated) =300 MHz

RETURN LOSS (RL) MEASUREMENT

Range

0.0 to -50.0 dB

Resolution

0.01 dB

CABLE LOSS MEASUREMENT

Range

0.0 to -50.0 dB

Resolution

0.01 dB

DTF MEASUREMENT

Measurement Range

3 ft to 328 ft

1 m to 100 m

Return Loss Range

0.0 to -50.0 dB

Cable types

USER, RG-8x, RG-8, RG-8foam, RG-8A, RG-55, RG-55A, RG-55B, RG-58, RG-58foam, RG-58A, RG-58B, RG-58C, RG-174, RG-213, RG-214, RG-223, RG-400

Velocity

0.00 to 1.00, automatically selected by cable type

Loss

0.00 to 100.00 dB per 100 ft, automatically selected by cable type

Est Length

40, 80, 200 or 400 ft

12.2, 24.4, 61 or 121.9 m

AUDIO METERS

AUDIO INPUT (AUDIO IN)

Source

BNC Input on front panel

Frequency Range

300 Hz to 10 kHz

Level Range

0.2 Vp-p to 5 Vp-p

SINAD METER (WITH 1 KHZ AUDIO)

Measurement Sources

Audio in, demod

Audio Frequency

1 kHz

Display Range

0 to 40 dB

Resolution

0.1 dB

Accuracy

±1.5 dB from 8 to 40 dB

DISTORTION METER

Measurement Sources

Audio in, demod

Audio Frequency

1 kHz

Reading Range

0% to 100%

Resolution

0.1%

Accuracy

±10% from 1% to 20%

AUDIO FREQUENCY COUNTER

Range Demod

FM

15 Hz to 20 kHz (IF BW set appropriately for received modulation BW)

AM

100 Hz to 10 kHz (IF BW set appropriately for received modulation BW)

Range Audio Input

15 Hz to 20 kHz

Audio Input Level

10 mV p-p to 5 V p-p

Resolution

0.1 Hz

Accuracy

± 1 Hz

AUDIO FREQUENCY LEVEL METER

Measurement Sources

AUDIO IN, DVM

Frequency Range

200 Hz to <5 kHz

Input Level

AUDIO IN	10 mV rms to 3 V rms (x1)
	1 V rms to 30 V rms ($\div 10$)
DVM	10 mV rms to 3 V rms (x1)
	1 V rms to 30 V rms ($\div 20$)

Display Unit Resolution

Volts	0.001 V
mV	0.001 mV
dBuV	0.001 dBuV
dBm	0.001 dBm
Watts	0.001W

Accuracy

$\pm 5\%$ Audio In

ANALYZER (OPTIONAL)

FREQUENCY

Range

2 MHz to 1 GHz

Resolution

1 Hz

Accuracy

Same as timebase

Span

10 kHz to 5 MHz in 1,2,5 sequence

EFFECTIVE RBW

Range

19 Hz to 25 kHz (Effective RBW calculated based on FFT window type and Span)

POWER BANDWIDTH

Offset Range

0 to ± 2.495 MHz

Bandwidth Range

1 kHz to 5 MHz in a 1,2,5 sequence (maximum bandwidth is the selected span)

Power Bandwidth Display Range

-137 dBm to +43 dBm

Power Bandwidth Display Resolution

0.001 dBm

Power Bandwidth Accuracy

± 3 dB (> -50 dBm into T/R, > -90 dBm into ANT or > -110 dBm into ANT with RF Amp On)

Displayed Average Noise Level (DANL)

-120 dBm (Typical, 10 kHz span) -136 dBm with pre-amp enabled

Sweep time

700 ms (Typical)

OSCILLOSCOPE (OPTIONAL)

Source

DVM, Audio In, Demod

Traces

One

Markers

Two

Trigger

Type

Auto, Norm

Edge

Rising, Falling

Level

-100 to +100 V

Horizontal

Range

0.5 ms/div to 0.1 sec/div

Accuracy

3% of full scale

Vertical

Range

FM demod

0.1 kHz to 50 kHz/div in a 1, 2, 5 sequence

AM demod

5, 10, 20, 50%/div

DVM and Audio in

10 mV to 10 V/div in a 1, 2, 5 sequence

Accuracy

10% of full scale

Coupling:

DVM Input: AC, DC and GND

AUDIO IN: AC

Input Impedance

DVM Input: 1 M Ω

AUDIO IN: 150 Ω , 600 Ω , 1 K Ω , High Z, Div by 10

Bandwidth

5 kHz

TIMEBASE

Temperature Stability

± 0.25 ppm at 25°C

± 0.5 ppm over temp range

Aging

1 ppm/year standard

Warm-up time

3 min.

ENVIRONMENTAL / PHYSICAL

Overall Dimensions

231 mm x 285 mm x 70 mm (W x L x D)

9.1 in. x 11.2 in. x 2.8 in.

Weight

8 lbs. (3.6 kg); 12 lbs. (5.4 kg) with accessories and softbag

Temperature

Storage: -51°C to +71°C storage

Note: Battery must not be subjected to temperatures below -20°C, nor above +60°C

Operation: -20°C to +55°C

Note: Battery to be charged at temperatures between 0°C and +45°C

Humidity

95% max. (non-condensing) (MIL-PRF-28800F Class 2)

Altitude

4,600 m max. (15,092 ft.) (MIL-PRF-28800F Class 2)

Shock, Functional

30G (MIL-PRF-28800F Class 2)

Vibration

Random 10 - 500 Hz (MIL-PRF-28800F Class 2)

Bench Handling

MIL-PRF-288000F, Class 2

COMPLIANCE

ENVIRONMENTAL

Use

Pollution degree 2

Mil-PRF-28800F class 2

Salt fog

Splash proof

Acoustic noise

Explosive atmosphere

Fungus resistance

Dust resistance

Drip proof

Solar radiation

EMC

Emissions

Mil-PRF-28800F

EN61326: 1998 class A

EN61000-3-2

EN61000-3-3

Immunity

Mil-PRF-28800F

EN61326: 1998

EN61000-6-1

SAFETY

Standard

UL 61010-1

Usage Environment

Indoor use, maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% RH at +40°C, Installation Category II, Pollution degree 2

AC INPUT POWER (AC TO DC CONVERTER / CHARGER UNIT)

AC Input Voltage Range

100 to 240 VAC, 1.5 A max., 47 Hz - 63 Hz

AC Input Voltage Fluctuation

Less than 10% of the nominal input voltage

Transient Overvoltage

According to Installation Category II

Usage Environment

Indoor use, maximum relative humidity 80% for temperatures up to 31°C decreasing linearly to 50% RH at +40°C, Installation Category II, Pollution degree 2

Operating Temperature

0°C to +40°C

Storage Temperature

-20°C to + 85°C

EMI

EN55022 class B, EN61000-3-2 class D

Safety

UL 1950, CSA 22.2 No. 234 and No.950, IEC 950/EN 60950

DC INPUT POWER

DC Input Voltage Range (DC INPUT CONNECTOR)

11 VDC to 32 VDC

DC Power Input, Max. (DC INPUT CONNECTOR)

55 W

DC Power Input, Nominal (DC INPUT CONNECTOR)

25 W

DC Fuse Requirement (DC INPUT CONNECTOR)

5A, 32VDC, Type F

BATTERY

Battery Type

Lithium Ion (Li Ion) battery pack

Note: Battery must not be subjected to temperatures below -20°C , nor above +60°C

Battery Operation Time

5 hours continuous use

No backlight, duty cycle 80% transmitter and 20% Receiver tests, Auto shutoff if key is not pressed for 10 minutes

7 hours typical use

Battery Charge Time

4 hours

Note: Battery to be charged at temperatures between +0°C and +45°C only

DIRECTIONAL COUPLER

Coupling

30 dB

Frequency Range

20 MHz to 200 MHz

Power Rating

250 W CW

Insertion Loss

0.25 dB Max.

VSWR

1.10:1 Max.

Flatness

+/- 0.5 dB Max.

Directivity

20 dB Min

Connectors

RF In: Type N

RF Out: Type N

FWD: BNC

REV: BNC

Kit Includes

Coupler (Werlatone Model: C1569-13)

2 BNC cables (12 in)

2 Adapters (N-F to BNC-F)

1 10 dB attenuator

20 db/50 W ATTENUATOR

Attenuator Type

Bi-Directional

DC - 18 GHz

Power Rating

(mounted horizontally): 50 watts average (bi-directional) to 25°C ambient temperature, derated linearly to 10 Watts @ 125°C. 1 kW peak (5 µsec pulse width; 2.5% duty cycle).

Maximum deviation over frequency

+ /- 0.75 dB

Maximum SWR

1.15

Kit Includes

20 dB/50 W attenuator

N-F, BNC-F adapter

TNC-M, N-M adapter

20 db/150 W ATTENUATOR

Attenuator Type

Uni-Directional

DC - 1.5 GHz

Power Rating

(mounted horizontally with fins vertical): 150 watts average (unidirectional) to 55°C ambient temperature, derated linearly to 10% @ 125°C.

Maximum deviation over frequency

± 0.50 dB

Maximum SWR

1.10

Kit Includes

20 dB/150 W attenuator

N-F, BNC-F adapter

N-M, BNC-F adapter

P25 FUNCTIONS

- C4FM modulation fidelity
- C4FM frequency error
- Power
- Tx BER
- STD 1011, 0.153 CAL generator for BER

VERSIONS, OPTIONS AND ACCESSORIES

When ordering please quote the full ordering number information.

Ordering Numbers	Description
3500A	Portable Radio Test Set
3500AUK	Portable Radio Test Set plus upgrade kit

3500A SUPPLIED ACCESSORIES

Case, Soft -Sided Carrying
External DC Power Supply
Power Cable (AC)
Handset
Short-Open-Load VSWR Calibrator
Comm Breakout Box
Cable (TNC) (M-M) (48 in)
2 X Cable (BNC) (M-M) (48 in)
5 X Adapter (BNC-F to TNC-M)
2 X Fuse, Spare (5 A, 32 Vdc, Type F)
Case, Accessory
Power Cable (DC cigarette lighter)
Getting Started Manual (Paper)
Operation/ICW Manual (CD)
Antenna (BNC) (50 MHz)
Antenna (BNC) (150 MHz)
Antenna (BNC) (450 MHz)
Antenna (BNC) (800 MHz)
Flash Drive, 1 GB USB

3500AUK ADDITIONAL SUPPLIED ACCESSORIES

Flip Cover
Attenuator (20 dB / 50 W)
Adapter (N-M to TNC-M)
2 X Adapter (N-F to BNC-F)

Attenuator (20 dB / 150 W)

Adapter (N-M to BNC-F)

Options

35XX0PT01	Spectrum Analyzer
35XX0PT02	Oscilloscope
35XXOPT07	P25 Test
35XXOPT08	Tracking Generator
35XXOPT33	NXDN™ Test
35XXOPT34	DMR Test

Optional Accessories

AC number	Description
AC27002	Attenuator (20 dB / 50 W), Adapter (N-F to BNC-F), Adapter (N-M to TNC-M)
AC27003	Attenuator (20 dB / 150 W), Adapter (N-F to BNC-F), Adapter (N-M to BNC-F)
AC27013	Directional Coupler (20 to 200 MHz), 2 X Adapter (N-M to BNC-F), Attenuator (10 dB), 2 X Cable (BNC) (M-M) (16 in)
AC27005	Battery, Spare
AC27001	Case, Transit
AC27006	Flip Cover
AC27009	CD Maintenance Manual (CD)
AC0820	Desk Top Stand
AC0826	Tripod
AC24006	Tripod, Dolly, Stand
AC25055	QMA Adapter Kit (Includes 24 assorted adapters)
AC25056	4 ft Blue Streak QMA to QMA Quick Connect Cable
AC25057	AC25055 + AC25056 Combo

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] 21 2028 3588
Fax: [+86] 21 2028 3558

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Fax: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

TAIWAN

Tel: [+886] 2 2698 8058
Fax: [+886] 2 2698 8050

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.