



# MICROLAB/FXR

LB wireless

## Low Pass Filter

High Power, Low Loss, Harmonic Filter  
Reliable Rod and Bead Design

- ◆ Designed to suppress harmonics of Radio Base Stations
- ◆ Up to 650 Watt Power Rating
- ◆ Reliable Rod and Bead Design
- ◆ Minimal RF Insertion Loss
- ◆ Low PIM Design
- ◆ RoHS compliant
- ◆ N and 7-16 mm DIN connectors
- ◆ Exceptional Reliability





Cellular Band LB-C08

Model	Connectors	Pass Band PB (MHz)	VSWR in PB	Insertion Loss in PB	Stop Band SB (MHz)	Loss in SB	Intermod PIM	Power Rating Avg	Power Rating Peak
LB-C07	N (f-f)	403 - 520	< 1.30:1	< 0.2 dB	806 - 3,600	> 55 dB	< -130 dBc	500W	3kW
LB-C08	N (m-f)	840 - 960	< 1.25:1	< 0.2 dB	1,680 - 4,800	> 55 dB	< -130 dBc	500W	3kW
LB-C26	7-16 mm (m-f)	840 - 960	< 1.20:1	< 0.2 dB	1,680 - 4,800	> 55 dB	< -140 dBc	650W	3kW
LB-C14	N (m-f)	1700 - 2000	< 1.25:1	< 0.2 dB	3,400 - 8,000	> 55 dB	< -130 dBc	300W	3kW

Microlab/FXR Rod and Bead Low Pass Filters are designed to suppress the harmonics of the transmitted base station signal. These harmonics are often generated in the final isolator.


For example the LB-C08/LB-C26 design passes the cellular band (840 - 960 MHz) almost without loss, while suppressing all harmonics out to beyond 4,800 MHz by at least 55 dB. When compared to other designs the single piece rod and bead filter has far fewer solder joints, is better supported, and operates cooler with a better VSWR. Housing is passivated aluminum with silver or triplate connectors. (8/06)

Environment: For indoor/outdoor, IP65  
Temperature: -35°C to +75°C

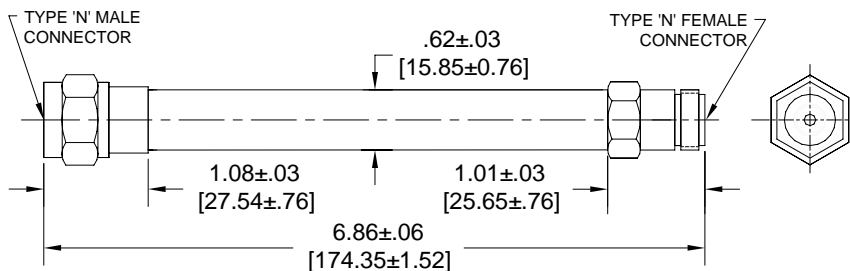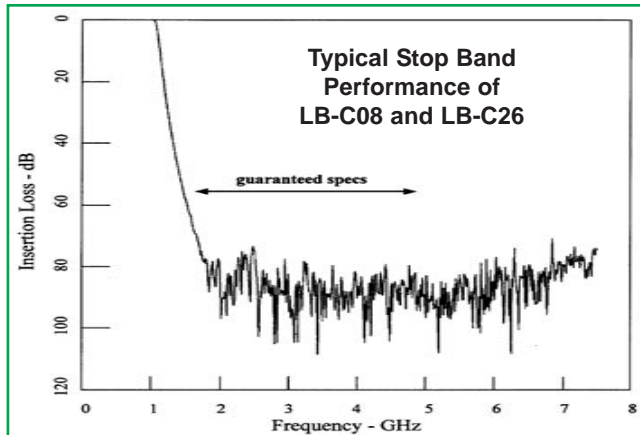

Overall Length in (mm)		
Model	Outline	Dimension A
LB-C07*		11.53 (292.1)
LB-C08	At left	6.86 (174.2)
LB-C14		4.63 (117.6)
LB-C26	Below	7.97 (202.3)

\*LB-C07 uses 2 female N

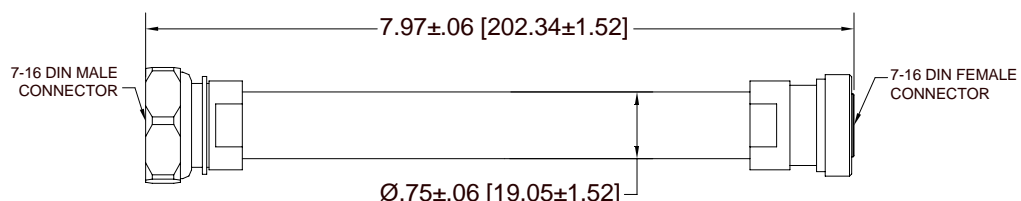

Microlab/FXR, A Wireless Telecom Group Company, 25 Eastmans Road, Parsippany NJ 07054  
Tel: (973) 386-9696 • [sales@microlab.fxr.com](mailto:sales@microlab.fxr.com) • [www.microlab.fxr.com](http://www.microlab.fxr.com) • Fax: (973) 386-9191