

S-Series

SGA Fast, Low Noise Signal Generator



Compact, easy to use, high performance signal generator for R&D, manufacturing and the field

Features


- Wide band cover:
 - SGA-3 - 100 kHz to 3 GHz
 - SGA-6 - 100 kHz to 6 GHz
- +13 dBm output (+20 dBm option)
- Low SSB phase noise: -135 dBc/Hz at 1 GHz, at 20 kHz offset
- Fast frequency settling time: 100 μ s
- Wide bandwidth AM, FM, \emptyset M with comprehensive and fully flexible modulation modes (option)
- Four internal 10 MHz modulation oscillators
- Internal pulse modulator/generator (option)
- Comprehensive frequency and amplitude sweep capabilities
- Half-rack width, 4U high with 8.5 inch touch-screen user-interface
- Synchronization and interaction with S-Series modules and instruments
- Aerolock™ interlocking mechanism for multiple instrument applications
- LAN and GPIB remote control
- Low cost of ownership through modular design
- Carrier phase control

The SGA employs a large touch-screen user-interface to provide a signal generator with unparalleled ease of use. With such a small form-factor, the SGA is equally at home in the field as it is in the laboratory or a production line. The use of Aeroflex's Fast Low Noise Synthesis (FLNS) technology, added to the experience gained through decades of developing leading-edge signal source products, ensures that signal purity and integrity have not been sacrificed in the quest for speed; the SGA excels in all respects. With a comprehensive range of features and options, the SGA meets the needs for a general-purpose signal generator while offering the high performance required of demanding, critical receiver measurements or rapid manufacturing.

Display and User-Interface

A large 8.5 inch touch-screen LCD enables all relevant set-up information to be displayed on one screen, and without the need to select configurations from lower level menu structures. It is quick to learn, easy to use, clear, with large characters and a wide viewing angle. Touch targets are sufficiently large to ensure usability even when wearing gloves. A pop-up keyboard is complemented with a touch-vernier control with adjustable sensitivity and a step control, both of which can be assigned to any variable parameter.

A mouse and keyboard may also be connected to allow ease of use when using Windows™ features.

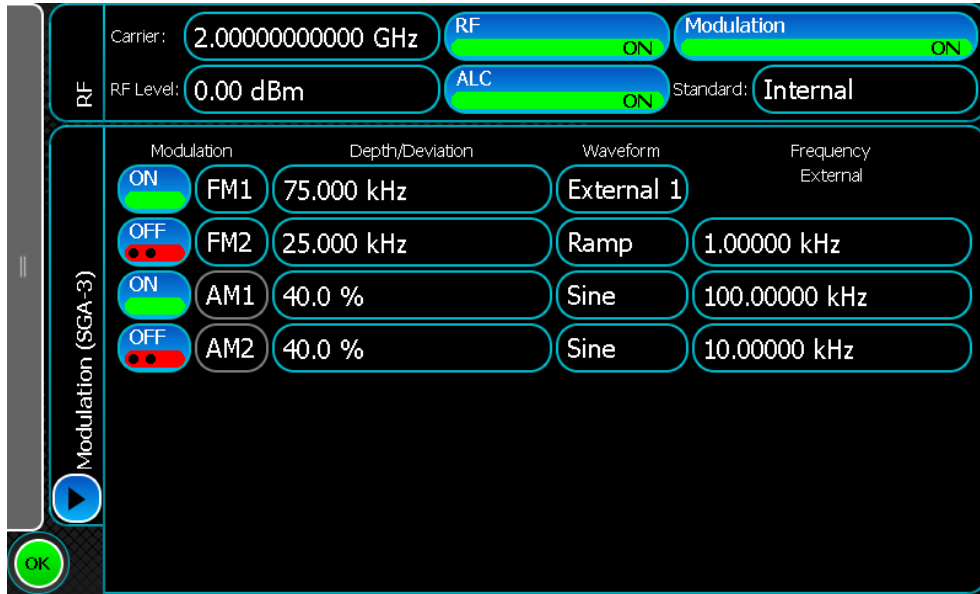


No knobs or keyboard, just a simple touch-screen user interface

Excellent Spectral Purity

The excellent noise characteristics and the low level of spurious signals of the SGA enable the instruments to be used with confidence for a wide range of critical measurements for the most demanding measurements on modern receivers, RF systems and A-D converters.

Low SSB Phase Noise

With a specified SSB phase noise performance of typically -135 dBc/Hz at 20 kHz offset from a carrier of 1 GHz, the SGA is easily able to measure receiver selectivity beyond 80 dB. The low residual FM noise figure of less than 1 Hz RMS at 1 GHz gives the SGA the capability of measuring receiver signal-to-noise ratios as high as 80 dB.

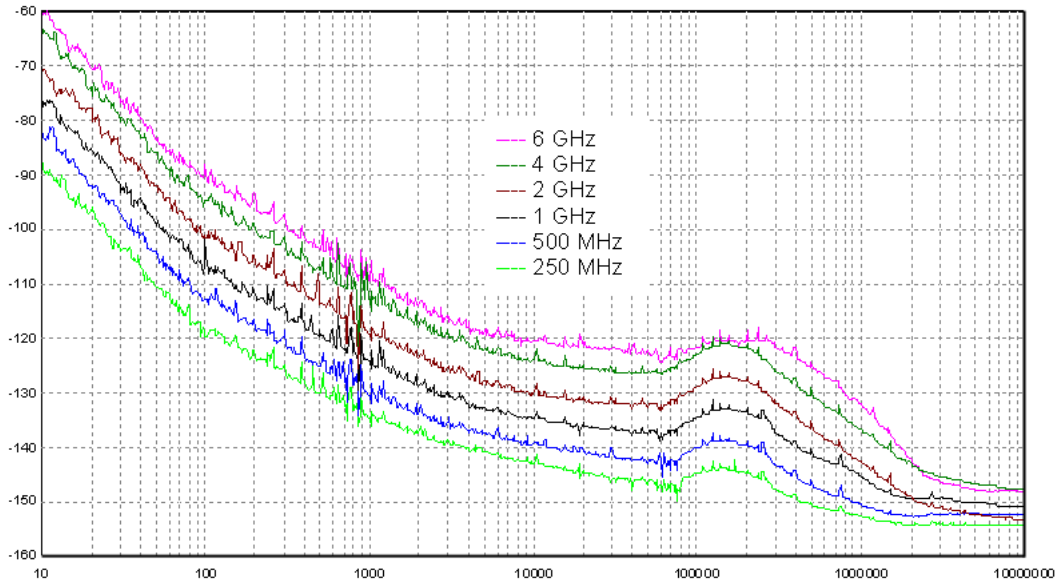

Graph of typical phase noise performance

Fast Frequency and Level Settling Times

These are critical parameters to ensure maximum throughput in production applications. With frequency and level settling times of 1 ms in conventional frequency selection mode, or 100 μ s in list mode, the SGA is ideally suited for frequency hopping and semiconductor production test applications.

RF Output

RF output up to +13 dBm can be set to a resolution of 0.01 dB. A high power option is available to extend the maximum calibrated RF level to +20 dBm.

In the tradition of Aeroflex's excellence in RF signal generation, the ultimate attention has been given to ensure the quality of the RF performance extends beyond the specification. Such attributes are:

- that no positive RF level transients generated as a result of changing between any frequency or level
- class-leading source VSWR specification helps to ensure that the specified RF level accuracy is more likely to be met when the load match is not ideal
- excellent linearity and monotonicity even over fine RF level steps
- repeatability ensures the same RF level is produced every time

The fastest level switching speed with a long life is achieved by the use of an electronic attenuator ensuring suitability for use in the most demanding production test applications.

Carrier Phase Control

This controls the phase of the carrier with respect to reference frequency standard and allows multiple SGA to be locked in frequency with controlled phase.

Flexible Modulation Capabilities (Option)

With four internal 10 MHz oscillators and two external modulation inputs, a wide selection of modulation modes is catered for. With four modulation channels it is possible to have single AM, FM or PM (phase modulation) and dual AM and FM (or PM) using any combination of internal and external sources.



Typical multiple modulation set-up

Wide AM and FM bandwidths support the testing of broadcast systems by allowing video signals to modulate the carrier with minimal distortion. Wideband FM also supports testing of equipment using frequency shift keying for high speed digital transmission and telemetry.

Sweep

The comprehensive sweep mode provides a digital sweep of carrier frequency and RF level in discrete steps. It is possible to set the start, stop, number of steps (or step size) and step time, up to a maximum of 65536 steps.

A sweep can be externally triggered via a rear panel BNC connector for Start, Start/Stop and Step, while up to six markers can be used to identify specific events within the sweep.



Typical frequency sweep set-up

List Mode Sweep

With a minimum dwell time of 100 us, list mode provides the ultimate in frequency switching speed. A table of up to 1000 carrier frequency and RF level values may be created. Start address, stop address and dwell time can be controlled and can be externally triggered from a rear panel BNC connector.



Creating a list in List Mode



List Mode control screen showing a List sweep in action

Pulse Modulation (Option)

An optional pulse modulator with internal pulse generator allows the generation of fast rise time RF signals with on/off ratios that meet the most demanding tests on radar RF and IF stages and EMC/ECCM test applications.

Avionics (Option)

This optional facility offers a single instrument solution for testing avionics receivers. Digitally generated modulating waveforms ensure excellent accuracy and stable performance under all operating condition allowing high performance receivers used for airfield alarm monitors to be tested with confidence. The avionics option supports the following systems:


- Instrument Landing Systems (ILS)
- VHF Omni Range (VOR) beacons
- Marker Beacons
- Automatic Direction Finder (ADF)
- COM/ID

Avionics parameters are presented in the same form as described in the International Civil Aviation Organization (ICAO) standards.

Modular Instrument Concept Employing Aeroflex's Aerolock™ Interlocking Mechanism

The SGA is designed to work with another SGA and a selection of S-Series modules which mount underneath.

Aerolock™ is an ingenious, simple and strong interlocking mechanism allowing SGA instruments and a full-rack width module, or two half-rack width modules, to be joined as one, creating a bespoke test solution. Weighing-in at less than 8 kg each, two SGAs joined together may be easily carried within the laboratory, the factory or the field without necessitating a 2-person lift.

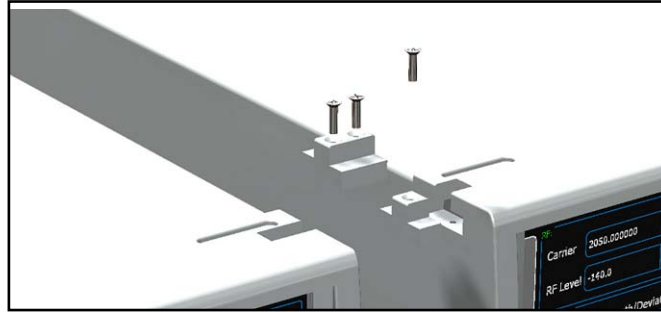

Aerolock™ interlocking mechanism



Two SGAs joined together as one

When a module is connected to the SGA via a USB plug & play interface, its presence will be automatically recognized and the features and applications relevant to that module will be available on the SGA.

Many applications will be supported including tests for power amplifiers, receiver selectivity, intermodulation, adjacent channel power and mixer testing, with many more to come in the future. It will be possible to couple the settings of one SGA with another, allowing quick and simple control across any frequency or level range where two sources with a defined relationship are required.

Remote Operation

LAN and GPIB interfaces are all supported using SCPI format commands where possible. Remote desktop and VNC are also supported allowing off-site remote control.

Non-Volatile Memory

Hundreds of full instrument setting stores may be configured. Each store may be independently named allowing quick search of required memory.

Removable Hard Disk (Option)

For use in secure areas, the optional removable hard disk allows easy removal of all sensitive instrument settings stores in the event the instrument has to leave the secure area. No settings data is stored in any other memory location within the instrument.

Low Cost of Ownership

The SGA comes with a standard 2-year warranty and recommended 2-year calibration periodicity. Options to extend the warranty to five years are available.

The instrument's software may be installed simply from a USB port so that upgrades can be performed with the minimum down-time and maximum convenience. The latest software version will always be available on Aeroflex's web site.

SPECIFICATIONS

All specifications apply after a warm-up period of 20 minutes.

FREQUENCY


Range	100 kHz to 3 GHz (SGA-3) 100 kHz to 6 GHz (SGA-6)
Resolution	0.01 Hz
Accuracy	As frequency reference
Settling Time (CW Mode)	Typical settling time to within 0.1 ppm of final frequency after receipt of remote interface delimiter: 5 ms
Settling Time (List Mode)	Typical settling time to within 0.1 ppm of final frequency after trigger pulse in List Mode.: <100 μ s for frequency changes exceeding 1.6 GHz within the frequency range above 3.2 GHz: >101 μ s
Carrier Phase	0 – 359.99 degrees in 0.01 degree steps Carrier phase controls the phase of the carrier with respect to the reference frequency standard, be it internal or external.

RF LEVEL

Range	<p>-130 to +13 dBm</p> <p>-130 to +10 dBm below 3 MHz</p> <p>When AM is selected, the maximum RF output level is linearly reduced by up to 6 dB depending on the requested AM depth.</p> <p>Step attenuator: 0 to 132.5 dB in 0.25 dB steps</p> <p>Note: Performance is not guaranteed below -120 dBm</p>																													
Range (option 003)	<p>-130 to +20 dBm</p> <p>-130 to +16 dBm below 50 MHz</p> <p>-130 to +10 dBm below 3 MHz</p> <p>-130 dBm to +19 dBm above 5.8 GHz</p> <p>Note: Performance is not guaranteed below -120 dBm</p>																													
Resolution	+0.01 dB																													
Accuracy at 23°C ±5°C	<table border="0"> <tr> <td>100 kHz - 50 MHz</td> <td><±0.7 dB</td> <td></td> </tr> <tr> <td></td> <td><±1.0 dB</td> <td>below -110 dBm</td> </tr> <tr> <td>>50 MHz - 3 GHz</td> <td><±0.5 dB</td> <td>+9.5 to -50 dBm</td> </tr> <tr> <td></td> <td><±0.7 dB</td> <td>below -50 dBm</td> </tr> <tr> <td></td> <td><±1.0 dB</td> <td>below -110 dBm</td> </tr> <tr> <td></td> <td><±1.0 dB</td> <td>above +9.5 dBm</td> </tr> <tr> <td>>3 GHz - 6 GHz</td> <td><±0.6 dB</td> <td>+8.5 to -50 dBm</td> </tr> <tr> <td></td> <td><±1.0 dB</td> <td>below -50 dBm</td> </tr> <tr> <td></td> <td><±1.0 dB</td> <td>above +8.5 dBm</td> </tr> </table> <p>Temperature stability +0.01 dB/°C up to 3 GHz, 0.02 dB/°C up to 6 GHz</p> <p>Specification applies ≥-120 dBm up to 3 GHz, ≥-100 dBm up to 6 GHz and ≤+16 dBm above 5 GHz</p>			100 kHz - 50 MHz	<±0.7 dB			<±1.0 dB	below -110 dBm	>50 MHz - 3 GHz	<±0.5 dB	+9.5 to -50 dBm		<±0.7 dB	below -50 dBm		<±1.0 dB	below -110 dBm		<±1.0 dB	above +9.5 dBm	>3 GHz - 6 GHz	<±0.6 dB	+8.5 to -50 dBm		<±1.0 dB	below -50 dBm		<±1.0 dB	above +8.5 dBm
100 kHz - 50 MHz	<±0.7 dB																													
	<±1.0 dB	below -110 dBm																												
>50 MHz - 3 GHz	<±0.5 dB	+9.5 to -50 dBm																												
	<±0.7 dB	below -50 dBm																												
	<±1.0 dB	below -110 dBm																												
	<±1.0 dB	above +9.5 dBm																												
>3 GHz - 6 GHz	<±0.6 dB	+8.5 to -50 dBm																												
	<±1.0 dB	below -50 dBm																												
	<±1.0 dB	above +8.5 dBm																												
Repeatability	Better than ±0.05 dB after warm up following a return from a change of frequency or level valid for at least 2 hours and excluding temperature influence																													
Monotonicity	<p>Typically better than 0.05 dB (-30 dBm to +13 dBm or to +20 dBm with option 003)</p> <p>Better than 0.2 dB typ. at an RF level between +3.0 and +4.5 dBm and between +9.0 dBm and +10.5 dBm.</p>																													
Switching Time	<p><100 μs to within 0.1 dB of final value (23°C ±5°C) after trigger pulse in List Mode</p> <p><150 μs when changing carrier frequency</p>																													
Output Impedance	50 Ω nominal																													
Output VSWR	<table border="0"> <tr> <td></td> <td><+3.5 dBm</td> <td><+9.5 dBm</td> </tr> <tr> <td>>1 MHz -3 GHz</td> <td><1.4:1</td> <td><1.5:1 typ.</td> </tr> <tr> <td></td> <td><+2.5 dBm</td> <td><+8.5 dBm</td> </tr> <tr> <td>>3 GHz</td> <td><1.6:1</td> <td><1.7:1 typ.</td> </tr> </table>				<+3.5 dBm	<+9.5 dBm	>1 MHz -3 GHz	<1.4:1	<1.5:1 typ.		<+2.5 dBm	<+8.5 dBm	>3 GHz	<1.6:1	<1.7:1 typ.															
	<+3.5 dBm	<+9.5 dBm																												
>1 MHz -3 GHz	<1.4:1	<1.5:1 typ.																												
	<+2.5 dBm	<+8.5 dBm																												
>3 GHz	<1.6:1	<1.7:1 typ.																												
Reverse Power Damage Level	+25 dBm, ±16 V DC																													
RF Level Offsets	<p>Up to the maximum output level range.</p> <p>A given RF level offset over a given frequency band</p> <p>A profiled RF level offset between two given frequencies</p> <p>A selection of both of the above</p>																													

SPECTRAL PURITY

SSB Phase Noise (CW Mode)	All values in dBc/Hz			
	Carrier freq	1 kHz	20 kHz	10 MHz
	100 MHz	-130	-140	-150
	250 MHz	-129	-140	-150
	500 MHz	-123	-136	-150
	1 GHz	-117	-130	-148
			(-135 typ)	(-152 typ)
	2 GHz	-111	-124	-148
	4 GHz	-105	-118	-140
	6 GHz	-101	-115	-135
Phase noise below 100 Hz offset is dependent upon reference phase noise				
Non-Harmonic Related Spurious (CW Mode)	At offsets >10 kHz:			
	Below 1 GHz, better than -80 dBc			
	Below 2 GHz, better than -76 dBc			
	Below 5 GHz, better than -70 dBc			
	Below 5.5 GHz, better than -68 dBc			
	5.5 to 6 GHz, better than -55 dBc			
Sub-harmonics	Below 1.5 GHz, better than -80 dBc			
	Below 3 GHz, better than -75 dBc			
	Below 6 GHz, better than -40 dBc			
Harmonics	1 MHz - 6 GHz	≤ -2 dBm, better than -30 dBc		
		≤ +8 dBm, better than -30 dBc typ.		
Residual FM (CW mode)	Less than 1 Hz RMS deviation in a 300 Hz to 3.4 kHz unweighted bandwidth at 1 GHz			
RF Leakage	Less than 0.5 μV at the carrier frequency into a single turn 25 mm loop 25 mm or more from the case			
RMS Jitter (CW mode)	Carrier freq.	RMS Jitter Bandwidth	RMS Jitter (measured performance)	
	1 GHz	1 Hz - 10 MHz	450 fs	
	155 MHz	100 Hz - 1.5 MHz	58 fs	
	622 MHz	1 kHz - 5 MHz	31 fs	
	2.488 GHz	5 kHz - 15 MHz	25 fs	

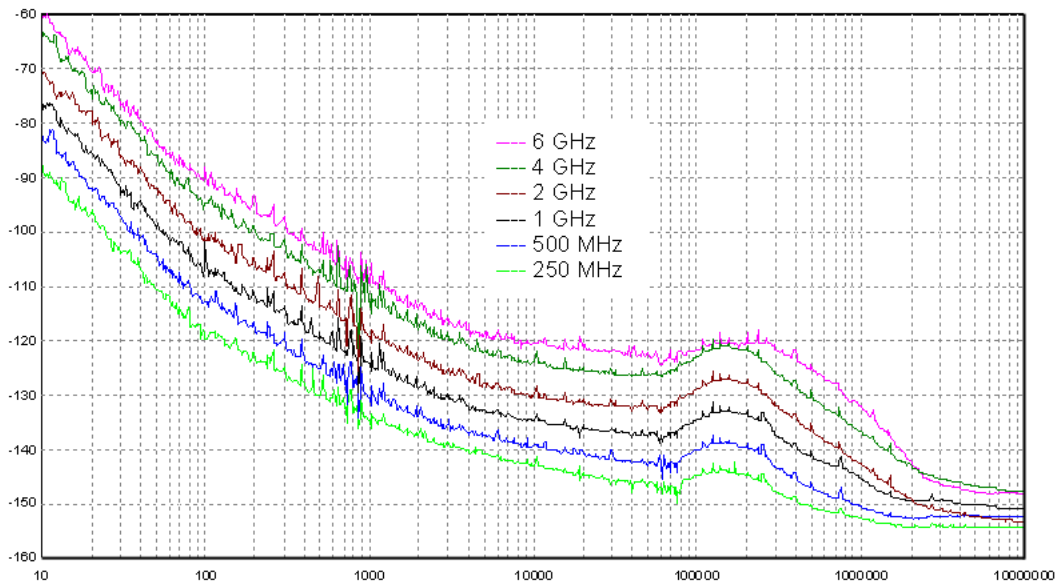

Typical phase noise performance at 250 MHz, 500 MHz, 1 GHz, 2 GHz, 4 GHz and 6 GHz

MODULATION

Modes

AM, FM, phase modulation – (Option 001)

Pulse modulation – (Option 004)

	AM1	AM2	FM1	FM2	PM1	PM2	Pulse
AM1		✓	✓	✓	✓	✓	✓
AM2	✓		✓	✓	✓	✓	✓
FM1	✓	✓		✓	✗	✗	✓
FM2	✓	✓	✓		✗	✗	✓
PM1	✓	✓	✗	✗		✓	✓
PM2	✓	✓	✗	✗	✓		✓
Pulse	✓	✓	✓	✓	✓	✓	

Allowable combinations:

Up to two simultaneous AM and or

Up to two simultaneous FM or ØM

A maximum of four modulation channels are available using any combination of four internal modulation oscillators and two external sources

All the above available with pulse modulation

FREQUENCY MODULATION – (OPTION 001)

Range	N
100 kHz - <30 MHz	1
30.0 - <46.875 MHz	1/64
46.875 - <93.75 MHz	1/32
93.75 - <187.5 MHz	1/16
187.5 - <375 MHz	1/8
375 - <750 MHz	¼
750 MHz - <1.5 GHz	½
1.5 - <3 GHz	1
3 - 6 GHz	2

Deviation	N x 10 MHz in wide mode N x 50 kHz in narrow mode		
Resolution	1 Hz		
Accuracy	±3 % of set deviation (1 kHz mod rate)		
Total Harmonic Distortion	<0.15% (at 1 kHz mod rate and 2% max deviation) <0.5% (at 1 kHz mod rate and 20% max deviation)		
Frequency response (1 dB typ.)	10 Hz - 10 MHz DC - 10 MHz	AC coupled DC coupled	Wide mode
	10 Hz - 50 kHz DC - 50 kHz	AC coupled DC coupled	Narrow mode

When internally modulated, the FM mode is automatically selected for optimum performance. When external modulation is selected, the user can select wide or narrow-band FM mode as required.

PHASE MODULATION – (OPTION 001)

Deviation	$N \times 100 \text{ rad}$
Resolution	0.01 rad
Accuracy	$\pm 3\%$ of set deviation (1 kHz mod rate)
Total Harmonic Distortion	<0.5% (at 1 kHz mod rate and 10 rad deviation) Typ. <0.1% (at 1 kHz mod rate and 1 rad deviation)
Frequency response (1 dB)	100 Hz – 10 kHz

AMPLITUDE MODULATION – (OPTION 001)

Depth	0 - 99.9%
Resolution	0.1%
Accuracy	+3% of set depth +1%, for carrier frequencies up to 2 GHz. AM is usable to 6 GHz. Add 0.2 dB for AM.
Total Harmonic Distortion 1 kHz mod rate	<1% for depths $\leq 30\%$ <2% for depths $\leq 80\%$
Frequency Response (3 dB)	10 Hz - 7 MHz AC coupled >50 MHz DC - 7 MHz DC coupled 10 Hz - 50 kHz AC coupled <50 MHz DC - 50 kHz DC coupled

INTERNAL MODULATION - (OPTION 001)

Four internal modulation sources.

Waveforms	Sine, 0 - 10 MHz Triangle, 0 - 1 MHz Square, 0 - 1 MHz +ve and -ve Ramp, 0 - 1 MHz
Resolution	0.01 Hz
Accuracy	As reference frequency oscillator
Total Harmonic Distortion	<0.1%
Frequency Response (1 dB)	DC to 10 MHz

Internal LF Output

One internal modulation source is available on the LF output rear panel BNC connector from a 50 Ω source impedance. The output level is variable from 1 mV - 1 V RMS at full scale modulation setting.

Output Level	1 mV - 1V RMS, full scale
Level Accuracy	2% at 1 kHz
Level Flatness	<1 dB, DC - 10 MHz, relative to 1 kHz

Function Generator Mode

One internal modulation source is available on the LF output rear panel BNC connector from a 50 Ω source impedance as an independent function generator.

EXTERNAL MODULATION – (OPTION 001)

Two external modulation inputs of >100 k Ω or 600 Ω (selectable)

Both inputs may be configured as AC or DC coupled

The modulation is calibrated for 1 V RMS or 1 V peak (selectable)

SWEEP FACILITY

Provides a digital sweep of carrier frequency, RF level and modulation source in discrete steps

Control of start, stop, number of steps and step time

Sweep can be externally triggered from a rear panel BNC connector (TTL) for Start, Start/Stop and Step

Modes	Continuous; single; externally triggered
Carrier Sweep Type	Linear, logarithmic
RF Level Step Size	0.01 dB minimum
Maximum Number of Steps	65536
Marker "event" Output	A TTL pulse will appear on the sweep marker output when specified parameter values have been reached. Up to 6 markers can be set.
Step Time Settings	Up to 10 s

List Mode Sweep Facility

Provides a table of carrier frequency and RF level values.

Start address, stop address and dwell time can be controlled.

Can be externally triggered from a rear panel BNC connector (TTL).

List can run with modulation applied, but can not be changed during playing of list.

Dwell Time Settings	Up to 10 s
List Size	Up to 1000 entries

REFERENCE FREQUENCY OSCILLATOR

Type	OCXO
Frequency	10 MHz
Temperature Stability (0° to 50°C)	Typically better than $\pm 1 \times 10^{-8}$
Ageing Rate	1 in 10^9 per day 1 in 10^7 per year
Warm Up Time	<10 minutes

MEMORY (80 GB HARD DISK)

Up to 500 full instrument setting stores

Each memory store can be given a unique name

Removable Hard Disk – (Option 005)

For use in secure areas, the removable hard disk may be extracted from the rear panel by releasing two screws.

The removable hard disk also contains the instrument's operating software.

PULSE MODULATOR/GENERATOR (OPTION 004)

Pulse Modulator	
On/off ratio	> 80 dB
Rise/fall time	< 10 ns
Maximum PRF	10 MHz
Video Breakthrough	< 100 mV

Internal Pulse Generator	
Modes	Free-run; triggered; single pulse; double pulse; adjustable doublet; external trigger
PRF/pulse period	0.01 Hz-10 MHz/100 ns-100s
Width	10 ns-60 s
Delay	0-60 s
Double-pulse spacing	10 ns-60 s
Resolution (delay/width/period)	10 ns

Effect on RF level specification:

On instruments not fitted with option 003 (high power)

Maximum specified RF level reduced to +7 dBm with pulse enabled

Maximum specified RF level reduced to +10 dBm with pulse disabled

On instruments fitted with high power, option 003

Maximum specified RF level reduced by 6 dB with pulse enabled

Maximum specified RF level reduced by 3 dB with pulse disabled

All other level dependent limits reduced by 3 dB with pulse fitted, but disabled and 6 dB with pulse enabled.

AVIONICS - (OPTION 006)

ILS Mode	
Tone Frequencies	90 Hz, 150 Hz nominal. Tone frequency may be changed by varying the ILS repetition rate of 30 Hz in 0.1 Hz steps. Tone frequencies maintain 3:1 and 5:1 relationships with the ILS rate.
Frequency Accuracy	As frequency standard
Tone Suppression	Either tone can be suppressed
Sum of Depth of Modulation (SDM) Range	0 to 99.9% in 0.1% steps representing the arithmetic sum of each tone depth
RF Accuracy of SDM	±2% of SDM setting for carrier frequencies up to 400 MHz At 40% SDM accuracy is ±0.8% depth At 80% SDM accuracy is ±1.6% depth
Difference in Depth of Modulation (DDM) Range	0 to 20% in 0.01% steps 20 to 99.9% in 0.1% steps
RF Accuracy of DDM	±0.02 of DDM setting ±0.0003 DDM (0.03% depth) At 0 DDM (on course) accuracy is ±0.0003 DDM (0.03% depth) At 0.155 DDM accuracy is ±0.0034 DDM (0.34% depth)
LF Output	Available from the LF Output connector
LF Accuracy of DDM	Equivalent to ±0.0003 DDM ±0.005 of setting At 0 DDM (on course) accuracy is ±0.0003 DDM

VOR Mode	
Bearing Control	Relative phase of 30 Hz tone and subcarrier modulation adjustable from 0° to 359.99° in 0.01° steps by entering VOR bearing. Bearing can be entered as TO or FROM the beacon.
Bearing Accuracy	±0.05°
Additional modulation	Available on 0° bearing from an internal or external modulation source
AM Depth Accuracy	±3% of setting ±0.5% for carrier frequencies up to 400 MHz

Frequency	The VOR repetition frequency of 30 Hz may be varied in 0.1 Hz steps. The subcarrier frequency and deviation maintain a fixed relationship with the VOR repetition rate
Frequency Accuracy	As frequency standard
9.96 kHz subcarrier - AM Range	0 to 49.9% depth in 0.1% steps
9.96 kHz subcarrier - Modulation	Frequency modulated by a 30 Hz tone with settable deviations of 240 Hz, 300 Hz, 360 Hz, 420 Hz, 450 Hz, 480 Hz, 510 Hz and 540 Hz
30 Hz Tone - AM Range	0 to 49.9% depth in 0.1% steps Arithmetic sum of 30 Hz tone and sub carrier limited to 99.8%

Marker Beacon

Provides default carrier of 75 MHz, 95% AM depth and a modulation frequency of 400 Hz, 1.3 kHz or 3 kHz corresponding to Outer, Middle and Inner Markers. Carrier frequencies, AM depth and modulation frequency can be adjusted from the default values.

ADF Mode

Provides default carrier of 190 kHz with 30% AM depth at 1 kHz rate.

Carrier frequency, AM depth, modulation rate and RF level can be varied from the default values.

COM/ID Mode

Provides a facility for modulating the RF carrier with morse code airport identifier code.

GENERAL DATA

Remote Control	
Systems	GPIO (IEEE 488) Ethernet (TCP/IP)
Command set	SCPI
Interface functions	SH1; AH1; T6; L4; SR1; RL1; PPO; DC1; DT1; CO; E2
Emulation	Aeroflex 2030/40 Series
Recommended Calibration Cycle	24 months
Weight	<8 kg (17.6 lbs)
Dimensions - H x W x D	177 mm (4U) x 222 mm x 490 mm (6.97 x 8.74 x 19.29 in.)

Instrument includes side strap handle and front tilt feet.

Instrument includes Aerolock™ interlocking mechanism with modules mounted above and below, and to another SGA on either side.

FRONT PANEL CONNECTORS

RF Output	50 Ω N-type
External Modulation Inputs	100 k Ω / 600 Ω BNC Damage levels: ± 5 V
2 x USB 2.0	Used with a memory stick for transferring memory stores, or other files in or out of the instrument Mouse or keyboard input

REAR PANEL CONNECTORS

RF Output (Option 007)	50 Ω N-type
External Modulation Inputs (Option 007)	100 k Ω / 600 Ω Damage levels: ± 5 V
Pulse Modulation Input	50 Ω BNC – TTL and CMOS compatible
4 x USB 2.0	Used with a memory stick for transferring memory stores or other files in or out of the instrument Module plug and play connection
Sweep out	BNC – Generates 0 – 10 V into $Z_{in} > 1$ k Ω when the generator is sweeping
Event Markers Output	BNC - User selectable markers for frequency or level provide an indication when the specified parameter values have been reached. LVTTTL logic output levels Damage levels: -5 V/+10 V
Trigger/Input	BNC – Applying 0 V or a switch closure starts the sweep or steps from point to point on the sweep. LVTTTL logic input thresholds Damage levels: -5 V/+10 V
Reference Frequency Input	BNC accepts 10 MHz at 200 mV to 2 V RMS into 50 Ω or 100 k Ω nominal. Damage levels: -0.5 V/+3 V
Reference Frequency Output	BNC – 10 MHz at 1.5 V pk-pk into 50 Ω Damage levels: -0.5 V/+6 V
LF Output	50 Ω BNC – The output may be configured to give an output from the internal modulation oscillator or from the internal modulation paths or as an independent function generator
GPIB Interface	As described under Remote Control
LAN Interface	As described under Remote Control

ENVIRONMENTAL

Rated Range of Use	
Temperature	0 to 50°C
Humidity	Up to 93% at 40°C
Altitude	Up to 3050 m
Conditions of Storage and Transport	
Temperature	-40 to +71°C
Humidity	Up to 95% at 40°C
Altitude	Up to 4600 m
EMC	EN 61326-1:2006, Emissions Class B, Immunity Table 1 – Performance Criteria B
Safety	EN 61010-1:2001 Safety requirements for electrical equipment for measurement, control and laboratory use-Part 1, General requirements.
Mechanical	MIL-PRF-28800F Class 3
Power Requirements	
AC Supply	100 – 240 V ~ (Limit 90 - 264 V) 50 - 60 Hz ~ (Limit 45 - 66 Hz) <100 VA

USER INTERFACE

Screen Size	8.5 inch, 16:9 aspect ratio, colour touch screen
Keys/Switches	Power on/standby Home key

ORDERING INFORMATION/PRODUCT STRUCTURE

SGA-3	100 kHz to 3 GHz analog signal generator
SGA-6	100 kHz to 6 GHz analog signal generator
Option 001	AM, FM and phase modulation
Option 003	High power (+20 dBm)
Option 004	Fast pulse modulation
Option 005	Removable hard disk
Option 006	Avionics (requires option 001)
Option 007	Rear panel connectors

Extended Warranty Options

Option 203	3 year warranty
Option 204	4 year warranty
Option 205	5 year warranty

Supplied Accessories

AC supply lead
Getting started manual
CD-ROM containing operating manual
CD-ROM containing factory test results and electronic calibration certificate

Optional Accessories

47000/068	Operating manual (paper format)
46880/124	Service manual supporting repair to module level
43129/189	1.5 m GPIB lead
46662/836	Soft carry case
46662/835	Hard transit case
46885/505	Single instrument rack mounting kit (front panel brackets)
46885/506	Double instrument rack mounting kit (front panel brackets)
43139/042	RF double screened connector cable 50 Ω , 1.5 m, BNC (m)
54311/095	RF double screened connector cable 50 Ω , 1 m, type N connectors
54311/092	Coaxial adapter N male to BNC female
59999/163	Precision coaxial adapter N male to SMA female

Complementary Modules (see separate datasheets)

SCO-6	10 MHz - 6 GHz Combiner module
SPA-6	10 MHz - 6 GHz Power amplifier module

CHINA Beijing

Tel: [+86] (10) 6539 1166
Fax: [+86] (10) 6539 1778

CHINA Shanghai

Tel: [+86] 21 2028 3588
Fax: [+86] 21 2028 3558

CHINA Shenzhen

Tel: [+86] (755) 3301 9358
Fax: [+86] (755) 3301 9356

FINLAND

Tel: [+358] (9) 2709 5541
Fax: [+358] (9) 804 2441

FRANCE

Tel: [+33] 1 60 79 96 00
Fax: [+33] 1 60 77 69 22

GERMANY

Tel: [+49] 89 99641 0
Fax: [+49] 89 99641 160

HONG KONG

Tel: [+852] 2832 7988
Fax: [+852] 2834 5364

INDIA

Tel: [+91] 80 [4] 115 4501
Fax: [+91] 80 [4] 115 4502

JAPAN

Tel: [+81] (3) 3500 5591
Fax: [+81] (3) 3500 5592

KOREA

Tel: [+82] (2) 3424 2719
Fax: [+82] (2) 3424 8620

SCANDINAVIA

Tel: [+45] 9614 0045
Fax: [+45] 9614 0047

SINGAPORE

Tel: [+65] 6873 0991
Fax: [+65] 6873 0992

TAIWAN

Tel: [+886] 2 2698 8058
Fax: [+886] 2 2698 8050

UK Stevenage

Tel: [+44] (0) 1438 742200
Fax: [+44] (0) 1438 727601
Freephone: 0800 282388

USA

Tel: [+1] (316) 522 4981
Fax: [+1] (316) 522 1360
Toll Free: 800 835 2352

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent company Aeroflex, Inc. ©Aeroflex 2011.

www.aeroflex.com
info-test@eroflex.com



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.