

- ◆ Connects 4 inputs to 4 outputs for neutral hosting of DAS
- ◆ Up to 30 dB Isolation, Low VSWR
- ◆ Low Specified PIM
- ◆ Low and High Wireless Bands
- ◆ High Average Power Rating
- ◆ Convenient connector spacing
- ◆ RoHS compliant




The 4x4 Hybrid is a matrix of four 3 dB Hybrid Couplers arranged so that signals applied to any of the four inputs will be split equally between the four outputs. This allows simple combining of multiple signals in the same wireless band to a common feeder cable, as might be required in a neutral host in-building distributed antenna system. Unused ports must be terminated externally in 50Ω.

Special attention has been directed in these versions to maximize isolation in the wireless bands and minimize passive intermodulation (PIM). Units may be moisture sealed for outside applications to meet IP67. All have connectors spaced for controlled wrench tightening of connectors. (11/09)

Impedance: 50Ω nominal
Environment: 0° to +50°C, IP64 (IP67 to order)
PIM, Intermod: <-150 dBc* (two 20W tones)
Enclosure Finish: Passivated Al.
Connector Finish: Triplate
Standoffs 7-16: Standard
N: To special order
*PIM <-160 dBc to special order

Model Number	N conn	7-16 mm	Frequency Range, MHz	Coupling dB	Input Isolation	Input VSWR	Power per Input Avg.	Peak	Weight lbs. (kg)
CM-34N	CM-34D		800 - 960	6.2 ± 0.5	>30 dB	<1.15:1	100W	3kW	2.2 (1.0)
CM-44N	none		800 - 2,170	6.2 ± 0.5	>25 dB	<1.20:1	60W	3kW	2.4 (1.1)
CM-54N	CM-54D		1,800 - 1,990 1,710 - 2,170	6.2 ± 0.5	>30 dB >25 dB	<1.15:1	100W	3kW	2.2 (1.0)

CM-34/54N or D Outline

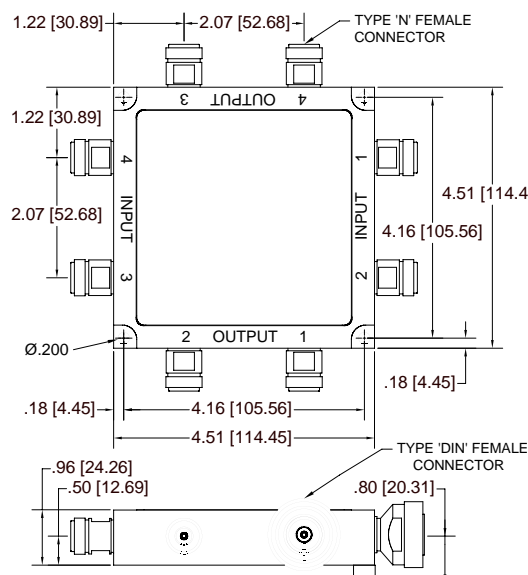

CM-44N Outline

